



DATACOM DUPLEX ZIP CABLES

Duplex Zip Cables 1.6 - 2.8 mm

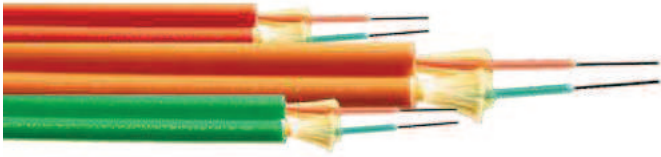

Cable structure

1. LSOH outer jacket
2. Aramid yarns
3. Central tight buffer Tube 600/900 µm with colored fibers 250 µm

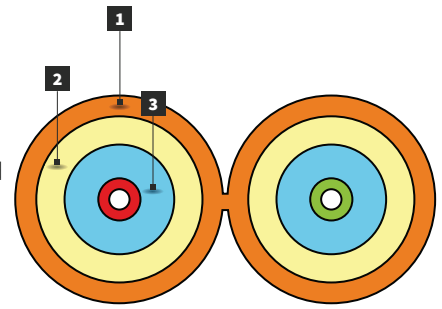

LSOH



Bendsafe



Easy to terminate



Easy-strip



Semi-tight




Configuration


ZIP				
Version	Fiber qty	Dimensions nominal ± 5% [mm]	Max. installation tension (ε=0.5%) [N]	Crush [N/10 cm]
2F	2	1.6 x 3.3	200	500
2F	2	1.8 x 3.7	300	500
2F	2	2.0 x 4.1	400	500
2F	2	2.8 x 5.7	600	1000

Jacket colors


Standard




SM G.652D
Yellow RAL 1021




SM G.657
A1 / A2 / A3
White RAL 9010




MM 62,5/125 OM1
Blue RAL 5015



MM 50/125 OM2
Orange RAL 2003



MM 50/125 OM3
Aqua RAL 6027



MM 50/125 OM4
Violet RAL 4003


Applications

- Distribution systems cable
- Patchcords and pigtails
- Terminals connection

Structure and composition

- LSOH with low coefficient of friction
- Aramid yarns
- 250 µm colored fibers

SM low-radius bending resistance

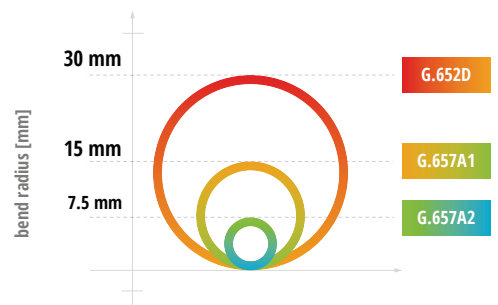

Operating temperature

