

Patchcord cat. 6 FTP/STP


Patchcord cat. 6 FTP/STP

FibrainDATA Patchcord cat. 6 FTP/STP
patchcord cable 500 MHz cat. 6A



Patchcord cat. 6 FTP/STP

Manufacturing technology

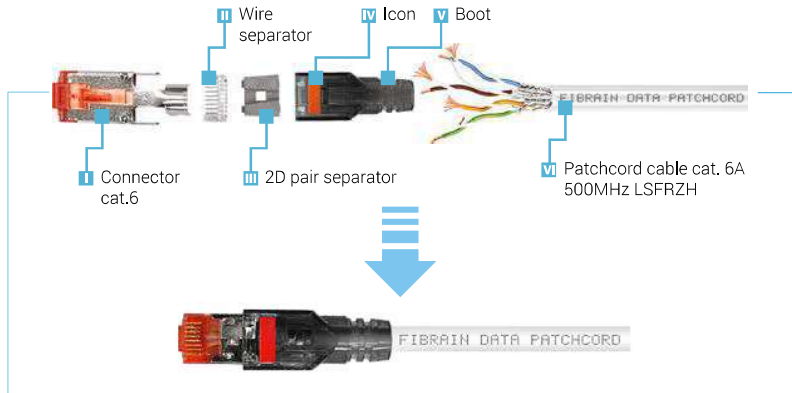

FTP/STP Distinctive features



4 cable identification steps



Cable frequency > cat. 6A



10Gbps bandwidth



2D Cross technology


Applications

- Connection to a user's point
- Connection to a consolidation point
- Supplied in Data Center and consolidation points
- Complete transmission channel




Identification system

IV cable identification steps

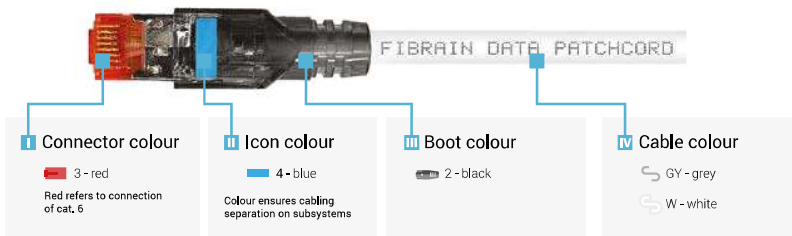

Manufacturing possibilities

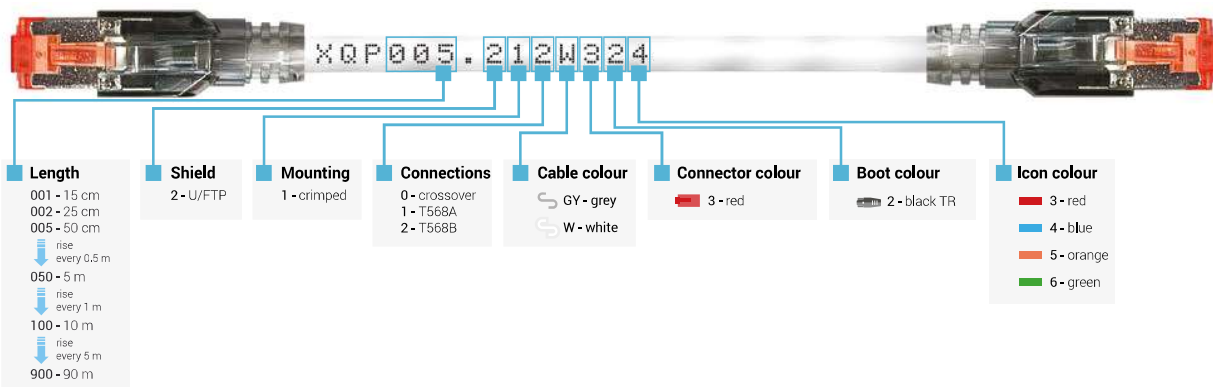



Manufacturing

STANDARDS

Cable colour	Length	
 grey	0.5 m	XQP005.212GY324
	1 m	XQP010.212GY324
	2 m	XQP020.212GY324
	3 m	XQP030.212GY324
	5 m	XQP050.212GY324
	10 m	XQP100.212GY324

Cable colour	Length	
 white	0.5 m	XQP005.212W324
	1 m	XQP010.212W324
	2 m	XQP020.212W324
	3 m	XQP030.212W324
	5 m	XQP050.212W324
	10 m	XQP100.212W324

Features

- Possibility of performing specifically designed solution to manage the infrastructure on a physical structure
- Made by Fibrain with the use of patented components which comply with all necessary mechanical norms in ANSI/ICESA S - 102-732-2009
- Twisted cable pairs ensure full compatibility with dynamic parameters for the dedicated line and transmission channel in accordance with ISO/IEC 11801:2011, EN501732011
- Durable elements ensure a number of cycles in accordance with IEC 60603-7-x, TIA/EIA 568-0.2
- Clear marking elements of structured cabling system in order to use a solid system,
- 2D pair separator
- Wire separator