

NEW

**HIGH DENSITY
APPLICATION**



NEW

MTP® Trunk cables

- ✓ 12 or 24 fibers in one connector
- ✓ Designed for SM and MM application
- ✓ Small diameter of ruggedized round cables
 - 12F → Ø 3.0 mm cable diameter
 - 24F → Ø 3.5 mm cable diameter
- ✓ Provide quick connection for up to 24 optical fiber
- ✓ Color coded housings available to differentiate fiber type
- ✓ Removable housing for quick gender change
- ✓ Female and male configuration available
- ✓ Polarization version A, B or C
- ✓ Alignment achieved with high precision guide pins with elliptical shape to minimize ferrule debris
- ✓ Low insertion loss
- ✓ 100% optical measurements
- ✓ 100% interferometric measurements
- ✓ Ideal solution for high fiber count, multi-row applications in array trunking, breakout modules

HIGH DENSITY APPLICATION

Available colors of connector housing



MTP® Fanouts – Direct Split


- ✓ This solution combine MTP® multi-fiber connectors with standard, single-fiber optic connectors
- ✓ Fanouting is made directly in the MTP® connector – without any additional furcation point
- ✓ Designed for SM and MM application, typically used in a 3U modular patch panel
- ✓ Wide range of single-fiber optic connectors, for example: LC, SC, E2000 with PC or APC polishing type
- ✓ Provide compact, cost effective solution for multi-fiber which require the MTP® hardware to be integrated with single-fiber connector assemblies
- ✓ Female or male configuration of MTP® connectors
- ✓ Low insertion loss
- ✓ Good value for money, the best price-quality ratio
- ✓ Different type of optical fiber available (G.652D, G.657, OM1, OM2, OM3 or OM4)

MTP® TRUNK/CONNECTING CABLES


Fiber optic patchcords terminated with MTP® connectors are specifically designed for Data Center system. MTP® connectors, using the MT ferrule, can increase the density of 4 to 72x compared to traditional, single-fiber optic connectors. MTP® patchcords and pigtails are specifically designed to be used in both single- and multimode transmission. Modern and repeatable production process, detailed quality control, interferometric as well as IL & RL parameters control measurement make Fibrain patchcords and pigtails reliable elements of tracks and fiber optic networks. Connecting elements terminated with MTP® connectors are popular and willingly used solution for Data Center cabling, backbone networks and local broadcast of bandwidth 40/100 Gb/s bandwidth.

FIBER IDENTIFICATION AND POLARIZATION CLASSIFICATION:


Polarization A

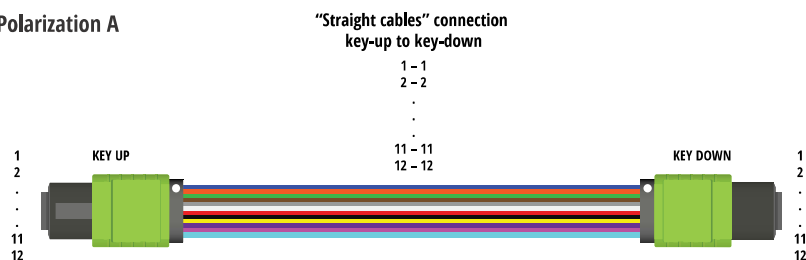

Polarization B

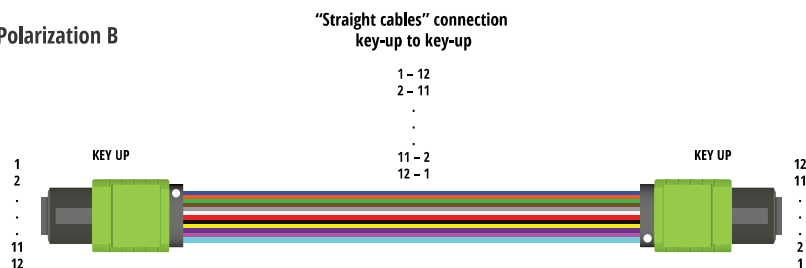

Polarization C

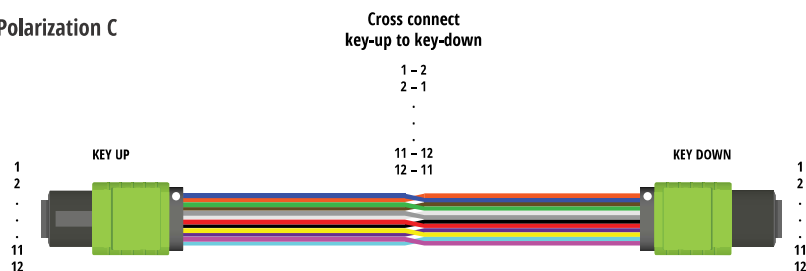

Ordering information

Class	Fiber qty	Connector		Boot type	Cable diameter	Length [m]	Cable type	Fiber type	Polarization
		A	B						
G-Gold	12-12	MTPA.F – MTP female APC	MTPA.F – MTP female APC	S – standard	R30 – round 3.0 mm	001.0	1 – DC PRIM	A – G652D	A
		MTPA.M – MTP male APC	MTPA.M – MTP male APC					D – G657A1	B
		MTP.F – MTP female	MTP.F – MTP female					E – G657A2	C
		MTP.M – MTP male	MTP.M – MTP male					H – OM1	
								I – OM2	
								K – OM3	
								L – OM4	

NEW



HIGH DENSITY APPLICATION

Technical specifications

Parameter	MTP APC SM	MM PC
Max. Insertion Loss IL _{MAX} Acc. IEC 61300-3-4	≤ 0.40 dB	≤ 0.40 dB
Typical Insertion Loss IL _{TYP} Acc. IEC 61300-3-4	≤ 0.20 dB	≤ 0.20 dB
Return Loss RL Acc. IEC 61300-3-6	≥ 65 dB	≥ 35 dB

Features

- In accordance with IEC 61754-7, TIA/EIA 568-C,
- High quality and repeatability of transmission parameters,
- Connectors made of high quality plastics,
- MTP connectors compatible with MPO connectors,
- Good value for money, the best price-quality,
- High quality MT ferrule provides placing a lot of optical fibers in one connector.

Applications

- Telecommunication networks,
- Data Center SYSTEMS,
- FTIX, FTTD, FTTB, FTTH networks

NEW

MTP® FANOUTS DIRECT SPLIT

Fibrain MTP® Fanouts of Direct Split type connect MTP® multi-fiber connectors with standard, single-fiber optic connectors. This solution is specifically designed to be used in singlemode and multimode transmission. Therefore, in our product portfolio, there is a wide range of fiber optic connectors. The side terminated with MTP® connectors includes male or female connectors- depending on customer's needs.



HIGH DENSITY APPLICATION

TECHNICAL SPECIFICATIONS

Multi-fiber MTP connectors

Parameter	MTP APC SM	MM PC
Max. Insertion Loss IL _{MAX} Acc. IEC 61300-3-4	≤ 0.40 dB	≤ 0.40 dB
Typical Insertion Loss IL _{TYP} Acc. IEC 61300-3-4	≤ 0.20 dB	≤ 0.20 dB
Return Loss RL Acc. IEC 61300-3-6	≥ 65 dB	≥ 35 dB

Single-fiber standard optical connectors

Parameter (connectors)	SM PC	SM APC	MM
Max. Insertion Loss IL _{MAX} Acc. IEC 61300-3-4	≤ 0.17 dB	≤ 0.20 dB	≤ 0.20 dB
Typical Insertion Loss IL _{TYP} Acc. IEC 61300-3-4	≤ 0.15 dB	≤ 0.16 dB	≤ 0.12 dB
Return Loss RL Acc. IEC 61300-3-6	≥ 55 dB	≥ 65 dB	≥ 35 dB

Fiber identification - fiber color (outer transparent tube)

1-12	1	2	3	4	5	6	7	8	9	10	11	12
Code	■	■	■	■	■	■	■	■	■	■	■	■
Color	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	aqua

Ordering information

Class	Fiber qty	Connector		Boot type	Cable diameter	Length [m]	Cable type	Fiber
		A	B					
G-Gold	12-12	MTPA.F – MTP female APC	SC	S -standard	09 - 900µm	001.0	DS – Direct Split	A – G652D
		MTPA.M – MTP male APC	SCA					D – G657A1
		MTP.F – MTP female	LC					E – G657A2
		MTP.M – MTP male	LCA					H – OM1
			FC					I – OM2
			FCA					K – OM3
			E2					L – OM4
			E2A					

Features

- In accordance with IEC, TIA/EIA standards ,
- High quality and repeatability of transmission parameters,
- Connectors made of high quality plastics,
- Good value for money, the best price-quality ratio,
- High quality MT ferrule, provides placing a lot optical fibers in one connector.

Applications

- Telecommunication networks,
- Data Center SYSTEMS,
- FTTx, FTTD, FTTB, FTTN networks